

North Bucks rRIPPLE
(ramblers Repairing & Improving Public Paths for Leisure & Exercise)
Activity Report – 1 June 2025 – 1 October 2025

Copies of before & after photos of all work are available on request. Man hours include some travel time. DaG = Donate a Gate. CAMS (Countryside Access Management System) is a reference used by BC (Buckinghamshire Council) for work requests. All work is requested and authorized by Alastair McVail, BC North Bucks PRoW Officer, or Jon Clark, BC Senior Strategic Access Officer. PG = Pedestrian Gate (e.g. Centrewire Marlow or Secure-a-Field Charnwood); KG = Kissing Gate (e.g. Centrewire Woodstock or Secure-a-Field Berkswell). DFU = Dinton with Ford & Upton.

“Installed to NB rRIPPLE standard” means the following: “Pedestrian gate installed c/w 22 mm washer, hinges greased, eye bolt thread copper greased and latch oiled. Latch 8 mm nut replaced with 8 mm security nut. Two 1.8 m x 100 x 100 UC4 15 year Redwood posts c/w Postsaver sleeves are attached to the gate’s H-frame with two 10 mm diameter coach screws. The posts and H frame are tamped in firmly with copious quantities of 20 mm and then 40 mm shingle. Improved by the Ramblers square decals and BC way markers fitted as appropriate.” KG slightly different as only one post needed and as from 30/1/19 we are now putting half a 20 kg bag of Post Fix or Remix on top of each of the two galvanized “feet” of the two hoops. Arisings, i.e. the timber from the old stile is cut up by chain saw and removed from site unless stated otherwise.

16/5/25 Brill. Michael Hughes responded to say he’d contact the PC about getting involved in their FP leaflet rewrite and improvements.

1/6/25 Ashendon. Venetia Davies, clerk, invited us to PC meeting on 9/6/25, but then changed date to 23/6/25.

7/6/25 Whitchurch. Emailed Charlotte Lincoln about the fact that FP10 doesn’t run along its definitive route along base of castle mound but out into the field to the south and around the copse edge.

7/6/25 Whitchurch WHI/46910 - Access for Land Rover to the proposed third gate. Emailed Charlotte and John Russell to suggest we carry our gear through the two gates we’ve just installed.

8/6/25 Slapton. Emailed contacts, including Tom Nash, for confirmation as to which of two stiles has permission from Tom Nash of Hill Farm for S2G.

8/6/25 Haddenham. Way-marker HAD/46975 on HAD/13/1 at SP759100. Checked access to way-marker at SW end of Westington Lane. 1 man hour. B. 10 miles.

8/6/25 Cuddington. Recce of new gate requested by Andrew Hughes, Parish Councillor, at edge of playing field opposite Spikett’s Lane. This is not a public right of way job. To be done by Haddenham RIPPLE.

9/6/25 Decals. Requested 50 straight on, 10 left and 10 right, FP round disc decals from Jon/Ann.

9/6/25 Great & Little Kimble GLK/27/1 deliberately blocked at the travellers’ camp in early 2020. Emailed Joanne Taylor for a progress report.

10/6/25 Slapton SLA/399 CAMS a01682 at SP941202 S2KG PC DaG - not completed Unable to install gate due to extensive concrete in the immediate area of stile and adjacent field gate. 4x6=24 man hours. (Included clearance of SLA/18/1 & SLA/20/1). BPeterPhil & MikeK. 25 miles. Peter 16.

12/6/25 Slapton SLA/436 at SP927192 S2G Parish Council DaG - Received CAMS a03938 from

Oliver Dawes. Oliver thanked us for organising permissions from Julie Holden at Lower Hortondale Kennels for this one and also with Phoebe Russell of Church Farm Slapton.

12/6/25 Slapton/Horton. Requested a CAMS for the clearance we carried out on FP SLA/18/1 and BW SLA/20/1 on 10/6/25.

13/6/25 Whitchurch. Followed up with Ann Catten on: "29/5/25 Whitchurch WHI/46910 at SP800207 S2G Parish Council DaG - Requested CAMS job sheet from Alastair & Ann."

13/6/25 Slapton. A rather sad but understandable message from Slapton Parish Council about frustration with landowners.

"Bill,

Many thanks for this and for all the work you have done on the stiles in the parish. I will walk the path you mention below and let you know how it's looking.

We decided not to continue with the kissing gate replacement project as parish council after you have installed the gate to replace the stile leading from the Horton orchard .

Basically, all involved are putting in a lot of effort for very little return. Landowners are reluctant to agree to replacements and have proved difficult to deal with.

Best wishes,
Maggie
Cllr Godsland"

11/6/25 Oving. Discussions with Rachel about gate on OVI/22/2 to stop dogs-off-leads from running into Pitchcott Road. 18/6/25 carried out recce. B 1 man hour. 10 miles.

19/6/25 Haddenham/Westlington. Talked to Robbie Mole. He's happy to have the way-marker reinstated so long as it's tight up to the hedge.

25/6/25 Ashendon. Michael Ayers attended parish council meeting to explain how we can assist with improving their footpath network with specific interest in pub walks from The Ash.

24/6/25 Hulcott. Followed up with Amanda Massingham, Clerk to PC wrt outstanding invoice.

24/6/25 Shabbington. Replaced rotted 150x150 gate post on wooden gate SHB/3968 on SHB/4/1 at SP669070. Dug around two sides of rotted post and screwed two 200 mm x 10 mm coach screws into buried stump. Erected three scaffold pole tripod to extract stump. Used ratchet winch borrowed from Michael Witney of Haddenham to extract stump. Fitted new 150 x 150 post c/w PostSaver sleeve. Adjusted gate and latch. Work carried out for landowner by Haddenham RIPPLE.

25/6/25 Aston Mullins near Ford on Wychert Way. Responded to 16/6/25 email from Charles Boon. Alan Cooper requested some improvement to a perennially flooded dip that renders the Wychert Way impassable during winter periods. WhatsApp'd Simon Hope, Landowner, to see if we could get something sorted – no response received.

25/6/25 Wychert Way website contacts. Called Brian Bowman to discuss getting the contacts updated and corrected.

26/6/25 CRFC. Delivery of two Marlows from Stowag for non rights of way jobs by Haddenham RIPPLE in Cuddington and Westlington.

26/6/25 Buckinghamshire Council. Conversation with Jon Clark and John Esslemont wrt the costing to BC of a gate installation. Figures provided to Jon.

26/6/25 Waddesdon WAD/5903 broken D loop at SP775134 noticed during U3A walk. CAMS requested 27/6/25 to fit IAE repair kit. CAMS a04017.

27/6/25 CRFC Collected buckets of stones; wide and standard Marlows and set of wide Centrewire hoops. 1 man hour. B. 10 miles.

30/6/26 Waddesdon WAD/5903 broken D loop at SP775134. Talked to Olly Pemberton, Waddesdon Estate Farm Manager, wrt gaining access to Eythrope's concrete road and letting security know of our intention to do work. Olly mentioned replacement of a "missing" kissing gate (WAD/44135 at SP770134) near Weir Lodge. He is to get a price for a self-reinstallation KG from StowAg.

8/7/25 Cuddington. Gate 369 - (Non rights of way gate). Removed awkward single, wide, horizontal hurdle barrier. Retained its two large support posts. Installed a Centrewire Marlow gate purchased from StowAg to NB rRIPPLE standard on northern edge of Recreation Ground to provide safer exit across Aylesbury Road to Spickett's Lane. 5x5=25 man hours. BPPJerryMikeT. Liaised with Andrew Hughes, parish council, and Malcolm Thomas, recreation ground. Not a public rights of way job.

8/7/25 Waddesdon. WAD/5903 on WAD/10/1 CAMS a04017 at SP775134 - D Loop repair kit fitted. 1 man hour. B. 15 miles.

9/7/25 Whitchurch. Followed up again: 13/6/25 Whitchurch. Followed up with Ann Catten on: "29/5/25 Whitchurch WHI/46910 at SP800207 on WHI/21/2 S2G Parish Council DaG - Requested CAMS job sheet from Alastair & Ann." CAMS a04153 subsequently received.

10/7/25: Cuddington. CUD/2510 at SP736108 S2G Parish Council DaG - Requested CAMS for third S2G at allotments following receipt of go ahead from Landowner James Gibson for a PG.

10/7/25 Buckinghamshire Council. John Esslemont, Ramblers Area Treasurer, requested an invoice from Jon Clark, Senior Access Officer at BC for £6,000 from our restricted Donate-a-Gate fund to go towards the cost of BC's next delivery of gates from Secure-a-Field.

17/7/25 Weston Turville parish council project for around ten DaGs. Took a look at the work needing to be done. BJosh. 2x1=2 man hours.



23/7/25 Cuddington. Gate 370 CUD/2510 at SP736108 S2G Parish Council DaG. Dismantled 2-rail, 2-step, 1-hand post, 1- dig latch stile. Installed PG to NB rRIPPLE standard. Made good short length of 3-rail fence to one side. 4x5=20 man hours. BPhilDaveWMikeK. 10 miles..

23/7/25 Haddenham. Way-marker HAD/46975 on HAD/13/1 at SP759100 CAMS a03698reinstated c/w Postsaver sleeve. Used repaired jack hammer to break through stones.

4x2=8 man hours. BPhilDaveWMikeK. 10 miles.

23/7/25 Cuddington. Met with parish councillors following their PC meeting at The Crown. Good discussion with Venetia Davies re footpaths in Cuddington and Ashendon.

24/7/25 CRFC. Collected gates and stones. 2 man hours. BK. 10 miles.

31/7/25 Whitchurch. Gate 371 WHI/46910 at SP800207 CAMS S2G Parish Council DaG. Removed remains of collapsed and rotten stile. Landscaped site to get level area to start installation. Installed PG to NB rRIPPLE standard. Made good two short lengths of three rail timber fencing to both sides. Fitted some metal anti-slip treads to adjacent timber bridge. 4x8=32 man hours. BPeterMikeKDaveW. 25 miles. Peter 20.

4/8/25 Cuddington. Fitted Cuddington PC DaG plaques to gates 360 and 361. 1 man hour. B. 10 miles.

5/8/25 Lower Winchendon. LNW/2646 at SP73711. Requested from Jon Clark a CAMS to replace our failed "temporary" fix of 22/7/22 with a Centrewire D latch repair kit.

6/8/25 Lower Winchendon. LNW/2646 at SP73711 CAMS a04335. Fitted D loop repair kit. 1 man hour. B. 10 miles.

6/8/25 Lower Winchendon timber kissing gate. Replaced four loose 12 mm nuts on hasp with lock nuts and one 8 mm nut on latch with security nut.

6/8/25 Cuddington. Gate 350, timber kissing gate, replaced four loose 12 mm nuts on hasp with lock nuts.

6/8/25 Lower Winchendon timber board walk. Secured several loose anti-slip treads with nails.

7/8/25 Cheddington. Gate 372 CHD/23 at SP920182 CAMS a03987 Cheddington Parish Council DaG. Installed Centrewire Medium Mobility KG to replace rotted away timber KG. Installed to NB rRIPPLE standard except no "Postcrete" used as no cattle in vicinity. Met with helpful and supportive local resident Katharine Allen. 5x7=35 man hours. BDPhilJerryMikeK. 40 miles; David 40.

8/8/25 Lewis Timber, Longwick. 2 man hours. BJerry. B 8 miles.

13/8/25 CRFC. Collected a gate and six buckets of stones. 1 man hour. B. 10 miles.

13/8/25 Impact Signs. Picked up two DaG plaques for Whitchurch. 1 man hour. B. 10 miles.

14/8/25 Slapton. Gate 373 SLA/436 at SP927192 CAMS a03938 Slapton PC DaG. Dismantled 3-rail, no-steps, no hand post stile. Installed Secure-a-Field PG to NB rRIPPLE standard and made good sheep netting fencing to one side. Help & assistance gratefully received from Julie Holden of Hortonwood kennels. 4x7=28 man hours. BPeterPhil & Michael. 25 miles. Peter 16.

14/8/25 Slapton. Proposed S2KG SLA/399 CAMS a01682. Visited site for a third time and decided this job is too difficult for us. The ground is extremely hard and there's concrete in the vicinity. A "NOT COMPLETED" CAMS report was submitted to Buckinghamshire Council.

16/8/25 Dinton Beer Festival. Our annual Summertime pilgrimage was well attended with an appreciated appearance from Jon Clark of BC who wished us all well.

18/8/25 Weston Turville. Received okay WhatsApp from Jerry Walker, Manor Farm, wrt access.

19/8/25 Weston Turville. Demolished remains of five dilapidated stiles and kissing gates in preparation for work replacing ten structures as discussed between Sarah Copley, PC Clerk and Alastair McVail. Completed recce of site. BJoeJoshMichaelPhilTony 6x6=36 man hours. 25 miles; Joe 10; Josh 4.



22/8/25 CRFC. Collected one Secure-a-Field Gate and two sets of Centrewire KG hoops for Weston Turville jobs. 1 man hour. B. 10 miles.

25/8/25 Whitchurch. Fitted Whitchurch PC DaG plaques to Gates 367 and 371. 1 man hour. B. 10 miles.

26/8/25 Weston Turville Gate 374 S2KG of WTU/47056 CAMS a04609 at SP856106 at the end of Barley Close. Demolished low 1-rail, 2-step, no hand post dilapidated stile. Installed KG to NB rRIPPLE standard less the "Postcrete" on the hoop feet. 4x7=28 man hours. Joe Jerry Phil Peter. Peter 16 miles. Joe 10.

26/8/25 Weston Turville Gate 375 KG2KG of WTU/1004 CAMS a04543 at SP856105 at end of Elm Close. Demolished dilapidated timber KG and replaced it with steel KG to NB rRIPPLE standard less the "Postcrete" on hoop feet. 3x7=21 man hours. Bill Josh MikeK. 25 miles. Josh 4.

30/8/25 Weston Turville - Requested job sheet CAMS swap - WTU/979 CAMS a03744, timber KG is in perfectly good working order and condition. Whereas WTU/1004 at SP856105 was a timber KG in dire need of replacement. Actually KG2KG'd on 26/8/25 as Gate 374.

31/8/25 Haddenham HAD/2446 missing finger at SP715075 on the A418 at Scotsgrove. Reported missing finger and requested a supply of fingers and the special steel tape strapping tool if BC want us to have that repair competency.

3/9/25 Oving. Haddenham RIPPLE installed a small lightweight wicket gate for the parish council at edge of dog-walking field to prevent dogs from running down OVI/22/2 at SP780210 into Pitchcott Road. 2x7=14 man hours. BJerry. 25 miles; Jerry 25.

4/9/25 CRFC Picked up 2 gates and 2 sets of Centrewire hoops. 2 man hours. BJerry. 10 miles.

16/9/25 Weston Turville Gate 376 S2KG of WTU/47059 CAMS a03748 at SP857106. Demolished dilapidated stile on 19/8/25. Replaced stile with Secure-a-Field gate with Centrewire hoops KG. 3x7=21 man hours. DMJosh. Josh 4 miles.

16/9/25 Weston Turville Gate 377 S2KG of WTU/992 CAMS a03742 at SP857107. Demolished dilapidated timber kissing gate on 19/8/25. Installed Secure-a-Field gate but due to very hard ground conditions the installation of the KG hoops was postponed. 3x7=21 man hours. BJoePhil. 25 miles; Joe 10.

17/9/25 Great & Little Kimble Clearance of vegetation on GLK/31/1 CAMS a03692 at SP821096. Blackthorn hedge and brambles cleared over a length of approximately 6 m to enable unhindered access to KG. Unfortunately the path is closed further on due to HS2 works. 2x2=4 man hours. BPhil. 15 miles.

22/9/25 CRFC Collected gate, hoops and stones. 2 man hours. B. 10 miles.

23/9/25 Weston Turville Gate 377 S2KG of WTU/992 CAMS a03742 at SP857107. NB: Timber KG demolished and gate installed on 16/9/25. Installed the KG hoops postponed from 16/9/25. Made good rails to one side. 3x7=21 man hours. BJoePhil. 25 miles; Joe 10.


23/9/25 Weston Turville Gate 378 TimberKG2steelKG WTU/978 CAMS a03743 at SP855108. Dismantled dilapidated timber kissing gate and attached rails. Very stoney ground. Installed Secure-a-Field PG with Centrewire hoops and made good four rails to one side. 4x7=28 man hours. Jerry Josh Mike T MikeK. Josh 4 miles.

24/9/25 Haddenham HAD/2444 at SP719071 CAMS a04541. Fitted Centrewire D Loop repair kit to failed PG. 2x1=2 man hours. 16 miles – 2 trips.

25/9/25 Land Rover near side front CV joint failed. Repairs by Josh completed 5/10/25.



South East Walker September 2025

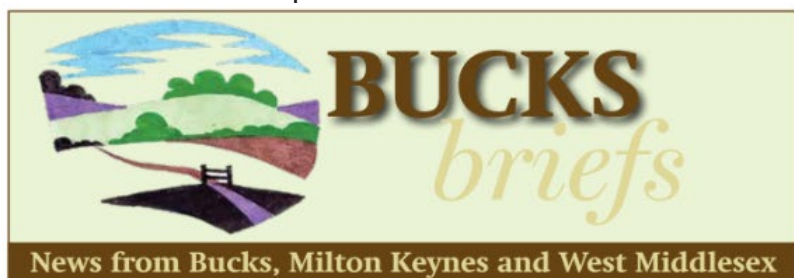

Promoting Rippling

Whilst installing a gate recently, a rambler passed by, halfway through surveying a route for his group. He explained his involvement in developing a RIPPLE group. Exchanging anecdotes and advice brought home to us the unique set of skills and experience that our group draws on to facilitate these jobs. From negotiations and organisation, to fundraising, ordering materials, raising invoices and significant amounts of other administration, the more enjoyable aspect is working outdoors as a group and improving access for fellow walkers.

At best, a job will be in open ground with no sub-surface obstacles, such as large stones, tree roots, or concrete foundations for old posts or stiles. Much of the time however, we will have to clear substantial overgrowth, remove and refit

adjacent fencing, sometimes laying in a pipe for electric fencing continuity, deal with large buried flints and debris, and clear litter from the site.

A little ingenuity is often required, as well as persistence and sheer brute force. Our scaffold pole tripod and hand winch is occasionally needed to remove a reluctant post stump that has rotted at ground level, and we have encountered concrete foundations for old posts that would have easily held up a street lamp. That is one of the reasons we use packed stones to anchor the support posts for our gates - less prone to cause rot and easier to remove and replace when the time comes. As that should be 15-plus years in the future, this will not concern older members of our group, but we are always trying to recruit younger members, and it's a pleasure to be able to pass on our knowledge to them, to like-minded groups - and to passing enthusiasts!

Jerry Mitchell
North Bucks rRIPPLE Group



Josh Hilbocus and Peter Smith stand proudly over two immense concrete blocks excavated whilst fitting a gate. Photo: Bill Piers.



Phil Dudley was relieved that the base of the timber post had finally been lifted clear using the group's makeshift tripod and winch.

24/8/23: Currently outstanding, potential and planned work with DaG opportunities available:

Ashendon: PC taking an active interest in RIPPLE, DaGs and developing some circular walks from The Ash Tree community buy-out pub.

Bierton: John Chantler getting landowner permissions for further Griffin Trust DaGs.

Bishopstone: Roger Goodchild gave permission on 9/5/22 for further S2Gs. We need to discuss with him or find a local champion to decide on priorities.

Brill: Several S2Gs on BRI/11/7 through Chinkwell Wood; BRI/11/6 towards Dorton Grange; BRI/3/4&5 Rushbed Woods to Cuckoo Close Farm. Waiting on Michael Hughes, resident, who may assist with the re-writing of the local footpath walk guides.

Chearsley: Potential S2G CHR/2785 on CHR/12/1 at SP713115 in memory of horse YaYa that died 1/2/22. Waiting on follow up by Anthony Adams who has made contact with the new landowner.

Chearsley: Bridge CHR/2803 at SP714097 that links LCR/9/4 and CHR/9/1. Corinne Brownsell the RoW Bridge Inspector made a site visit with Richard Heybrook. She is suggesting a timber bridge over the top of the existing concrete bridge. We are considering a permissive bridge, higher and slightly downstream of the existing bridge.

Cuddington: CUD/8/1 - Cuddington Footpath Team following up with farmer wrt last two stiles.

Great & Little Kimble GLK/27/1 at SP820096 footpath illegally blocked by Travellers' site since early 2020. Steve Miles, of Long Crendon, owns adjacent field but is reluctant to encourage any further land-grab by the travellers. On 23/11/23 Buckinghamshire Council served notice on four residents of Springfield Farm Travellers Site. The council has been prompted by The Ramblers who have served a Form 1 on the council. No noticeable progress.

Great & Little Kimble GLK/4219 on GLK/27/1. Request from Harry Leach as to whether we could carry out a S2G here. Responded that as far as we know the path is obstructed by the travellers' camp and that there are problems associated with the path.

Hulcott: John Chantler getting landowner permissions for further Griffin Trust DaGs.

Kimblewick: 5xS2KGs. Waiting since c2020 on request to go ahead from landowner Ted Walker.

Long Crendon: Two awkward and/or dilapidated stiles on LCR/11/1 at SP698093 at College Farm, George Morris is the farmer. Sandy Hooper is the interested parish councillor. Followed up with email on 19/1/23. Waiting on follow up by Alex Bond, PCMS, who knows the Morris family.

Lower Winchendon: LNW/2594 on LNW/2/2 CAMS a00309 at SP726112. Anthony Adams has obtained permission from Rob Mole, Bridge Farm. This is close to the Bristol Gate on Aylesbury Road, from Cuddington to Chearsley opposite road up to Nether and Upper Winchendons. Currently on hold due to ongoing dispute/negotiations between Rob and Alastair wrt a Chilton path.

Lower Winchendon LNW/2646. Not sure where or what the problem is. Info requested from Ann Catten, BC PRoW

Westcott. Sue Lacey has become local champion.

Whitchurch: WHI/7478 on WHI/7/1 at SP799202. Recce of poor stiles and farmyard showed that the definitive map only shows a finger post and one stile whereas on the ground there is a finger post and three stiles, one of which is dilapidated. Landowner would be happy if we were to repair his stile but not replace any stiles with gates.

Whitchurch WHI/7508 on WHI/59/1 at SP800205 CAMS 84294. Replace two stiles either side of collapsed bridge with PGs. Potentially John Russell DaGs. Agreed with Alastair that BC's work party will now replace both the bridge and the two S2Gs as one job, therefore off our list. Still not done Sept 2025.

NB rRIPPLE on site man hours – includes a proportion of travel time but not administration time which is considerable!	S2Gap / Bridge/ Steps	S/KG repair e.g "D" Latch.	Dog way	S2PG		S2KG		WayMk Post
					DaG		DaG	
224 for period 30 Jan 2015 – 6 Aug 2015	2G	11	9	2	0	1	0	2
66.5 for period 13 Aug 2015 – 17 Nov 2015	0	5	5	0	0	0	0	0
72 for period 18 Nov 2015 – 16 Jan 2016	1B	0	0	6	0	0	0	0
74 for period 17 Jan 2016 – 15 Mar 2016	1G	0	0	2	0	0	2	1
120.25 for period 16 Mar 2016 – 11 Jun 2016	0	0	0	7	0	0	0	1
133 for period 12 Jun 2016 – 14 Aug 2016	1G	0	0	6	1	1	1	0
142 for period 15 Aug 2016 – 21 Sept 2016	0	0	0	2	1	0	2	0
104 for period 22 Sept 2016 – 13 Nov 2016	0	1KG	0	1	1	0	3	3
94 for period 14 Nov 2016 – 31 Dec 2016	0	0	0	4	1	0	0	0
271 for period 1 Jan 2017 – 31 Mar 2017	0	0	0	5	3	1	5	0
216 for period 1 Apr 2017 – 31 May 2017	0	0	1	7	0	0	5	0
185 for period 1 Jun 2017 – 27 Aug 2017	1	0	0	2	5*	0	3	0
193.5 for period 28 Aug 2017 – 25 Nov 2017	1B + 1G	0	0	8	3	0	1	0
187 for period 26 Nov 2017 – 25 Feb 2018	1B + 1G	0	0	3	6	0	3	0
170.5 for period 26 Feb 2018 – 22 May 2018	0	0	1	5	2	2	2	3
300 for period 23 May 2018 – 23 Aug 2018	0	0	0	5	3	3	4	0
231 for period 24 Aug 2018 – 23 Nov 2018	1 Step	0	0	2	3	2	4	0
207 for period 24 Nov 2018 - 23 Feb 2019	0	0	0	5	2	2	2	0
319 for period 24 Feb 2019 – 23 May 2019	0	0	0	5	4	2	4	0
432 for period 24 May 2019 - 23 Aug 2019	0	1	1	5	11	1	2	0
366 for period 24 Aug 2019 – 23 Nov 2019	0	0	0	7	5	2	1	0
276 for period 24 Nov 2019 – 23 Feb 2020	0	0	0	2	1	1	5	0
83 for period 24 Feb 2020 – 31 May 2020	0	0	0	1	2	0	0	0
37 for period 1 Jun 2020 – 23 Aug 2020	0	0	0	0	2	0	0	0
346 for period 24 Aug – 25 Nov 2020	0	0	0	4	5	0	4	0
370 for period 26 Nov 2020 – 9 June 2021	1G	0	0	1	9	2	2	0
521 for period 10 June 2021 – 14 Nov 2021	2 steps	3KG	0	1	9	2	5	0
473 for period 15 Nov 2021 – 2 Mar 2022	1G	1KG	0	2	7	0	6	0
232 for period 3 Mar 2022 – 31 May 2022	0	0	0	1	3	3	2	0
323 for period 1 Jun 2022 – 31 Aug 2022	0	0	0	2	5	5	2	0
211 for period 1 Sep 2022 – 30 Nov 2022	0	0	0	3	4	1	1	0
241 for period 1 Dec 2022 – 28 Feb 2023	0	0	0	1	0	1	5	0
253 for period 1 Mar 2023 – 3 Jun 2023	0	0	0	1	2	2	4	0
203 for period 3 Jun 2023 – 31 Aug 2023	0	1	1	1	0	4	1	0
267 for period 1 Sep 2023 – 30 Nov 2023	1 step2G	0	0	0	3	4	3	1
77 for period 1 Dec 2023 – 29 Feb 2024	0	0	0	0	0	0	2	0
144 for period 1 Mar 2024-31 May 2024	0	0	0	0	0	4	1	0
243 for period 1 Jun 2024-31 Aug 2024	1G	0	0	1*	2	0	6	0
122 for period 1 Sep 2024-30 Nov 2024	1G	0	0	0	2	0	2	0
298 for period 1 Dec 2024-31 May 2025	0	0	0	0	4	0	5	0
388 for period 1 Jun 2025-1 Oct 2025	0	1	0	1	3	0	6**	1
Totals	3B/10G/4	18	18	111	114	46	106	11

*Includes for three Bristol Combination Gates. **Weston Turville PC & non-PC DaGs promised.

S2PG etc. = Stile converted to Pedestrian Gate. (Steel Marlow/Charnwood gate; occasionally timber gate.)

S2KG etc. = Stile converted to Kissing Gate. (Steel Woodstock/Berkswell gate; occasionally timber.)

Total number of gates installed = 378 of which 220 have been DaGs.

Signed: *William (Bill) Piers*

North Bucks rRIPPLE Co-ordinator and Donate a Gate Scheme Organizer

williamjsbpiers@gmail.com Mobile 07799 110128

Many thanks to the team: myself – Bill Piers, (Allen), Andrew, David, (Derek), Jerry, (Joe), John, Josh, Keith, Michael, Mike Kershaw, Mike Thirlwall, Peter and Phil, but in particular to Jerry who does a lot of the donkey work involving recces, discussions with landowners about access and liaising with parish councils, etc etc. We estimate that for every man hour of work carried on outdoors an hour is spent on admin.



10/6/25 Slapton PC
DaG at SP941202 -
not completed



10/6/25 clearance of
SLA/18/1



10/6/25 clearance of
SLA/20/1



8/7/25 Cuddington.
(Non rights of way PC
funded gate). (369)



8/7/25 Waddesdon D
Loop repair kit fitted at
SP775134.



23/7/25: Cuddington
PC DaG at SP736108.
(370)



23/7/25 Haddenham.
Way-marker at
SP759100



31/7/25 Whitchurch
PC DaG at SP800207.
(371)



7/8/25 Cheddington
PC DaG at SP920182.
(372)



14/8/25 Slapton PC
DaG at SP927192.
(373)



26/8/25 Weston Tur-
ville at SP856106 at
end of Barley Close.
(374)



26/8/25 Weston Tur-
ville at SP856105 at
end of Elm Close.
(375)



3/9/25 Oving Small wicket gate – Haddenham RIPPLE job.




16/9/25 Weston Turville at SP857106 behind Chequers car park. (376)



16 & 23/9/25 Weston Turville at SP857107 at end of long alley. (377)



17/9/25 Great & Little Kimble Clearance of vegetation at SP821096.

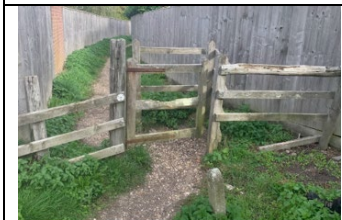

23/9/25 Weston Turville off Main Street at SP855108 beside Five Bells car park. (378)



24/9/25 Haddenham D Loop repair kit fitted at SP719071.